



LED A-SHAPE LAMPS

CCT SELECTABLE



**OFFERED IN 5 AND 3 CCT
SELECTABLE OPTIONS**

**DIMMABLE AND
NON-DIMMABLE MODELS
AVAILABLE**

**STANDARD A19 SHAPE FOR
A VARIETY OF APPLICATIONS**

**90 CRI FOR EXCEPTIONAL
COLOR RENDERING**

Illuminate any space with ease using SATCO|NUVO's A19 lamps with ColorQuick™ technology. These versatile lamps allow you to choose the perfect color temperature for any room, creating an atmosphere that suits your mood. Whether you want to relax in the living room after a long day, or work in a well-lit office, our lamps offer the perfect lighting solution. Available in both dimmable and non-dimmable configurations, you can adjust the brightness to your liking. With a high 90 CRI, our lamps provide exceptional color rendering, ensuring that colors look vibrant and true-to-life. They are also rated for damp locations and enclosed fixtures, making them suitable for use in any area of your home. Ideal for use in bedrooms, living rooms, offices, table lamps, floor lamps, ceiling fans, and more, these A19 lamps are the perfect addition to any space.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 60Hz

Power Factor: 0.7

Efficacy: Up to 114 LPW

CRI: 90

Beam Angle: 220°

Location Rating: Damp

Ambient Operating Temperature:
-20°C (-4°F) / up to +45°C (+113°F)

Rated for Enclosed Fixtures

Construction: Plastic



ITEM SPECIFICATIONS / ORDER INFO

Item	Description	UPC	Lumens	Wattage	Replacement Wattage	CCT	Base	Rated Hrs	Master Pack
Non-Dimmable									
S11770	6A19/LED/3CCT/E26/120V	045923117701	470	6W	40W	3000K/4000K/5000K	E26	10K	24
S11774	6A19/LED/3CCT E26/120V/4PK	045923117749	470	6W	40W	3000K/4000K/5000K	E26	10K	12-4 Packs
S11771	9A19/LED/3CCT/E26/120V	045923117718	800	9W	60W	3000K/4000K/5000K	E26	10K	24
S11775	9A19/LED/3CCT/E26/120V/4PK	045923117756	800	9W	60W	3000K/4000K/5000K	E26	10K	12-4 Packs
S11772	12A19/LED/3CCT/E26/120V	045923117725	1,100	12W	75W	3000K/4000K/5000K	E26	10K	24
S11776	12A19/LED/3CCT/E26/120V/4PK	045923117763	1,100	12W	75W	3000K/4000K/5000K	E26	10K	12-4 Packs
S11773	14A19/LED/3CCT/E26/120V	045923117732	1,500	14W	100W	3000K/4000K/5000K	E26	10K	24
S11777	14A19/LED/3CCT/E26/120V/4PK	045923117770	1,500	14W	100W	3000K/4000K/5000K	E26	10K	12-4 Packs


Dimmable

S11790	5A19/LED/5CCT/E26/120V	045923117909	450	5W	40W	2700K/3000K/3500K/4000K/5000K	E26	25K	48
S11791	8.8A19/LED/5CCT/E26/120V	045923117916	800	8.8W	60W	2700K/3000K/3500K/4000K/5000K	E26	25K	48
S11792	12A19/LED/5CCT/E26/120V	045923117923	1,100	12W	75W	2700K/3000K/3500K/4000K/5000K	E26	25K	48
S11793	14A19/LED/5CCT/E26/120V	045923117930	1,600	14W	100W	2700K/3000K/3500K/4000K/5000K	E26	25K	48
S11794	8.8A19/LED/5CCT/GU24/120V	045923117947	800	8.8W	60W	2700K/3000K/3500K/4000K/5000K	GU24	25K	48
S11795	12A19/LED/5CCT/GU24/120V	045923117954	1,100	12W	75W	2700K/3000K/3500K/4000K/5000K	GU24	25K	48
S11796	14A19/LED/5CCT/GU24/120V	045923117961	1,600	14W	100W	2700K/3000K/3500K/4000K/5000K	GU24	25K	48

DIMENSIONS

ITEM	MOL	MOD	WEIGHT (lbs)
S11770	4.41"	2.36"	0.08
S11771	4.41"	2.36"	0.08
S11772	4.59"	2.36"	0.11
S11773	4.59"	2.36"	0.13
S11774	4.41"	2.36"	0.08
S11775	4.41"	2.36"	0.08
S11776	4.59"	2.36"	0.11
S11777	4.59"	2.36"	0.13

ITEM	MOL	MOD	WEIGHT (lbs)
S11790	4.57"	2.36"	0.10
S11791	4.57"	2.36"	0.10
S11792	4.57"	2.36"	0.11
S11793	4.57"	2.36"	0.15
S11794	4.29"	2.36"	0.11
S11795	4.29"	2.36"	0.11
S11796	4.29"	2.36"	0.15

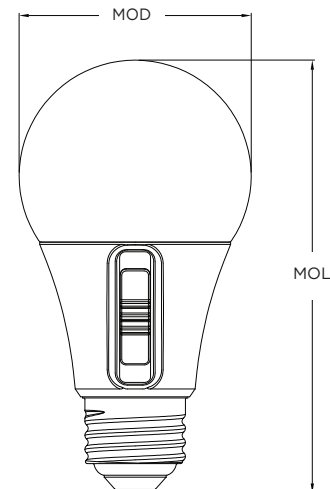

Specifications are subject to change without prior notice.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture.

Visit SATCO.com for dimmer compatible.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.