


LED PAR LAMPS

CCT SELECTABLE

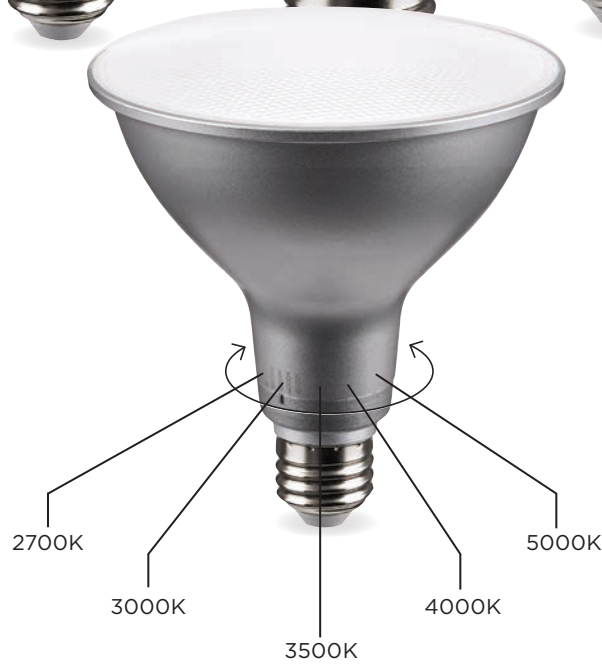


5 CCT SELECTABLE
WITH UNIQUE COLOR
SELECTION DIAL

AVAILABLE IN THREE
BEAM ANGLE OPTIONS

RATED FOR USE IN
ENCLOSED FIXTURES

WET LOCATION RATED
FOR USE INDOORS
AND OUTDOORS



SATCO|NUVO's LED PAR Lamps are the perfect solution for recessed and flood lighting. Offered in PAR20, PAR30, PAR30 Long Neck, and PAR38, choose 25°, 40° or 60° beam angles for the best illumination for your application. All models include a unique dial for the choice between 2700K/3000K/3500K/4000K/5000K color temperatures to create different ambient indoor or outdoor environments.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V,60Hz
Dimmable
Efficacy: up to 90 LPW
CRI: 90
CCT: 2700K/3000K/3500K/4000K/5000K

Functional Life (L70): 25,000 Hours
Location Rating: Wet
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Rated for Enclosed Fixtures
Construction: Silver Polycarbonate
Lens: Clear Polycarbonate




ITEM SPECIFICATIONS / ORDER INFO

Item	Lumens	Wattage	Input Current	Beam Angle	CBCP (cd)	UPC	Master Pack
PAR20							
S11580	500	5.5W	0.078A	25°	1,255	045923115806	24
S11581	500	5.5W	0.078A	40°	884	045923115813	24
PAR30							
S11582	1,000	11W	0.117A	25°	2,910	045923115820	12
S11583	1,000	11W	0.117A	40°	1,315	045923115837	12
S11584	1,000	11W	0.117A	60°	834	045923115844	12
PAR30LN							
S11585	1,000	11W	0.117A	25°	2,910	045923115851	12
S11586	1,000	11W	0.117A	40°	1,315	045923115868	12
S11587	1,000	11W	0.117A	60°	834	045923115875	12
PAR38							
S11588	1,200	13.3W	0.180A	25°	3,700	045923115882	12
S11589	1,200	13.3W	0.180A	40°	2,160	045923115899	12
S11590	1,200	13.3W	0.180A	60°	1,000	045923115905	12
S11591	1,400	15.5W	0.208A	40°	1,758	045923115912	12

DIMENSIONS

Item	MOL	MOD	Weight (Lbs)
PAR20	3.19"	2.48"	0.10
PAR30	3.62"	3.74"	0.24
PAR30LN	4.65"	3.74"	0.24
PAR38	5.12"	4.76"	0.34

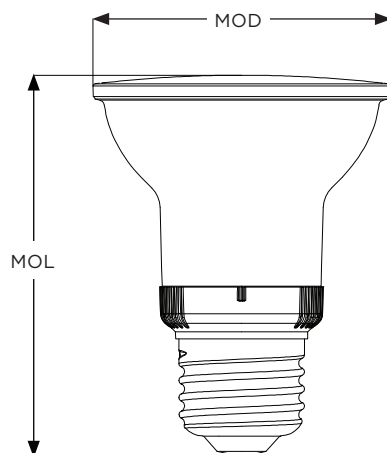

ENERGY SAVINGS

Item	LED Wattage	Fluorescent Replacement Wattage	Incandescent Replacement Wattage
PAR20	5.5W	11W	50W
PAR30	11W	15W	75W
PAR38	13.3W	23W	90W
PAR38	15.5W	25W	120W

Specifications are subject to change without prior notice.
 Replacement wattage shown depends on application and fixture.
 Fixture may not be compatible with all dimmers.
 WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.