
SATCO NUVO

Project Name

Location

Prepared By

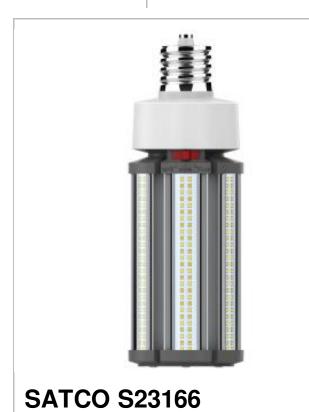

54W/LED/CCT/277-480V/EX39

Notes

Location Rating

Energy Star

Status	Active
Status Watts	54W
	200W
Incandescent Equivalent HID Equivalent	250W
Volts	277V-480V
	Corncob
Shape Base	Mogul Extended
ANSI Base	EX39
Finish	White
CCT (Kelvin)	3000K/4000K/5000K
Temperature	Warm to Cool White
CRI	80
	7020L/7560L/7290L
Lumens Page Spread	300
Beam Spread Dimmable	
	Yes-Dimmable
Hours Rated	
Lamp Type	
Technology Min Compartment Size	LED
Min Compartment Size	Length: 7.87 in. Width: 7.87 in.
Ballasting Requirements	Ballast Bypass
Electrical	
Operating Frequency	50/60Hz
Dimming Type	Smart-Starfish App through Wifi Module only
Dimming Note	Only dimmable via WiFi Module 80- 954 (available for purchase) and via the Starfish App
Power Factor	0.9
Operating Position	Universal
Surge Protection	Built-in surge protection - 4KV
THD	
שווו	8.90%
Operating Temperature	8.90% -30C (-22F) to +45C (+113F)
-	
Operating Temperature	
Operating Temperature Physical	-30C (-22F) to +45C (+113F)
Operating Temperature Physical MOL	-30C (-22F) to +45C (+113F)
Operating Temperature Physical MOL MOD	-30C (-22F) to +45C (+113F) 9.53 3.35
Operating Temperature Physical MOL MOD Lens Finish	-30C (-22F) to +45C (+113F) 9.53 3.35 Clear
Operating Temperature Physical MOL MOD Lens Finish Lens Material	-30C (-22F) to +45C (+113F) 9.53 3.35 Clear Plastic
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color	9.53 3.35 Clear Plastic Dark Gray
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor	9.53 3.35 Clear Plastic Dark Gray Optional
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor Weight (lb.)	9.53 3.35 Clear Plastic Dark Gray Optional
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor Weight (lb.) Additional Information	9.53 3.35 Clear Plastic Dark Gray Optional 1.65
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor Weight (lb.) Additional Information Rated For Enclosed Fixture	-30C (-22F) to +45C (+113F) 9.53 3.35 Clear Plastic Dark Gray Optional 1.65
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor Weight (lb.) Additional Information Rated For Enclosed Fixture IP Rating	-30C (-22F) to +45C (+113F) 9.53 3.35 Clear Plastic Dark Gray Optional 1.65 Yes IP64
Operating Temperature Physical MOL MOD Lens Finish Lens Material Housing Color Photocell or Sensor Weight (lb.) Additional Information Rated For Enclosed Fixture IP Rating Warranty	-30C (-22F) to +45C (+113F) 9.53 3.35 Clear Plastic Dark Gray Optional 1.65 Yes IP64

Damp

No

DLC Approved	Yes
DLC ID	S-1ESYVO
CA T20 / T24 Rationale	Exempt - Base Not Regulated
NSF Approved	No
California Status	Lawful for sale in California
Title 20 / 24 Status	Lawful for sale
RoHS Compliant	Yes
FCC Compliant	Yes
SDS Sheet	LED_Lamp

Copyright 2023 Satco Products, Inc. All Rights Reserved

For More Information Visit: https://www.satco.com/



