
SATCO NUVO

Project Name

Location Prepared By

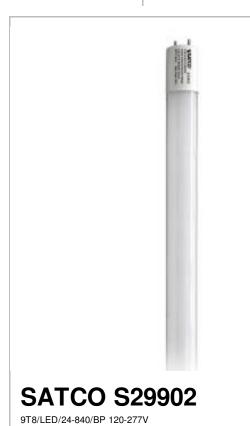

Notes

General	
Status	Discontinued
Substitute	S39902
Watts	9W
Incandescent Equivalent	75W
Fluorescent Equivalent	17W
Volts	120V-277V
Ballast Type	Type B
Shape	T8
Base	Medium Bi Pin
ANSI Base	G13
Nominal Length	24
Finish	Frost
CCT (Kelvin)	4000K
Temperature	Cool White
CRI	82
Lumens	1150L
Beam Spread	210
Dimmable	Non-Dimmable
Hours Rated	50000
Product Category	Linear
Technology	LED
Electrical	
Ballasting Requirements	Ballast Bypass
Power Factor	0.9
Operating Temperature	-20C (-4F) to +45C (+113F)
Physical	
Physical	24
Physical MOL	24
Physical MOL MOD	1
Physical MOL MOD Material	1 Glass
Physical MOL MOD Material Lens Finish	1 Glass Frost
Physical MOL MOD Material Lens Finish Lens Material	1 Glass Frost Glass
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.)	1 Glass Frost
Physical MOL MOD Material Lens Finish Lens Material	1 Glass Frost Glass
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.)	1 Glass Frost Glass
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information	1 Glass Frost Glass 0.24
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed)
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs -
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture Warranty	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs -
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture Warranty Compliance	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs - Ballast Bypass CULus - Classified; cULus -
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture Warranty Compliance Safety Listing	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs - Ballast Bypass CULus - Classified; cULus - Certified
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture Warranty Compliance Safety Listing Location Rating	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs - Ballast Bypass CULus - Classified; cULus - Certified Damp
Physical MOL MOD Material Lens Finish Lens Material Weight (lb.) Additional Information Tube Guard Use Installation Notes Specification Note Rated For Enclosed Fixture Warranty Compliance Safety Listing Location Rating Energy Star	Glass Frost Glass 0.24 Approved for use with tube guards Not for use in vapor tight fixtures. Existing wiring to both sockets can remain in place. Will work on both shunted or non-shunted sockets. Built-in shock resistant circuit - (not hot until both ends are installed) Yes 5 Year Limited - T8 LED Bulbs - Ballast Bypass CULus - Classified; cULus - Certified Damp No

California Status	Lawful for sale in California
Title 20 / 24 Status	Lawful for sale
Colorado Status	Lawful for sale
Hawaii Status	Lawful for sale
Nevada Status	Lawful for sale
Vermont Status	Lawful for sale
Washington Status	Lawful for sale
RoHS Compliant	Yes
FCC Compliant	Yes
NSF Approved	Yes
SDS Sheet	LED Lamp

Copyright 2023 Satco Products, Inc. All Rights Reserved

For More Information Visit: https://www.satco.com/



