


Project Name

Location

Prepared By

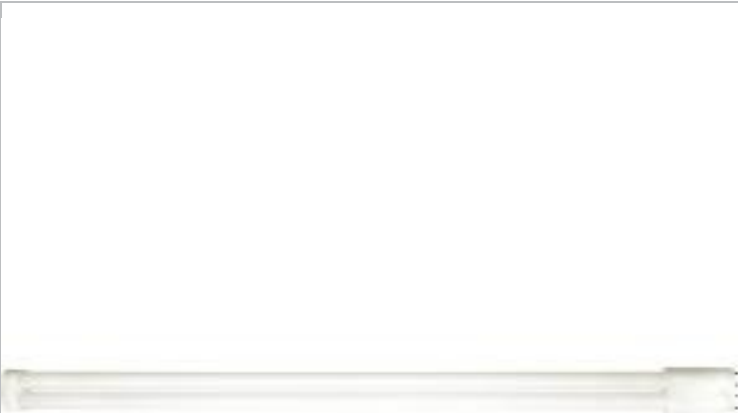

# SATCO S9730

23PLL/LED/835/DR

## Notes

(revised) 09-11-2023 23-43-02

## General

Status	Obsolete
Watts	23W
Fluorescent Equivalent	40W
Volts	Ballast Dependent
Ballast Type	Type A
Shape	T5
Base	2G11
ANSI Base	2G11
Finish	Frost
CCT (Kelvin)	3500K
Temperature	Neutral White
CRI	80+
Lumens	2600L
Beam Spread	360
Dimmable	Non-Dimmable
Hours Rated	50000
Product Category	PL
Operating Position	Universal
Technology	LED

## Electrical

Ballasting Requirements	May not be compatible with all rapid start ballasts; Direct Replacement-for use on Instant Startand Rapid Start ballasts with no rewiring required
Operating Temperature	-20C (-4F) to +45C (+113F)

## Physical

MOL	22.5
MOD	1.75
Housing Color	White
Weight (lb.)	0.36

## Additional Information

Installation Notes	Not for use in vapor tight fixtures.
Warranty	5-Years

## Compliance

Safety Listing	cULus
Location Rating	Damp
DLC Approved	No
NSF Approved	Yes
California Status	Lawful for sale in California
Title 20 / 24 Status	Lawful for sale
Colorado Status	Lawful for sale
Hawaii Status	Lawful for sale
Nevada Status	Lawful for sale
Vermont Status	Lawful for sale
Washington Status	Lawful for sale
RoHS Compliant	Yes
FCC Compliant	Yes
SDS Sheet	LED_Lamp